





**PROFORMAX**  
INTEGRATED ROOFING ACCESSORIES

Cambridge Architectural shingles offer the best results when installed with the recommended integrated Proformax roofing accessories showcased below.



Shingles are your home's first line of defense, but they protect, perform and look their best when you choose IKO Proformax roofing accessories to go with them.

<p><b>1</b></p>  <p><b>StormShield®</b> This modified bitumen roll roofing product protects critical roof areas like valleys and eaves, that are susceptible to water leakage. It's self-adhesive for watertight sealing and self-sealing around roofing nails.</p>	<p><b>2</b></p>  <p><b>Stormtite®</b> This synthetic underlayment is stronger than conventional felts. It's more resistant to tearing and shredding when installers walk on it. Stormtite is more flexible and installs easily, even in cool weather. It's the perfect combination of strength and flexibility.</p>	<p><b>3</b></p>  <p><b>Leading Edge Plus™</b> Its efficient use of material provides two strips from every shingle, easily separated along a factory-perforated line. IKO's own high-strength thermally activated sealant is on every strip, helping ensure wind resistance at that critical first course of shingles.</p>	<p><b>4</b></p>  <p><b>Hip &amp; Ridge 12™</b> These shingles are lightweight, perforated, and with a pre-cut tapered headlap to give you three perfectly sized pieces with no cutting required. They are available in colors that pair with our most popular laminate shingles. Install by simply bending and nailing in place.</p>
---	---	--	--

**THE IKO ADVANTAGE**

Limited Warranty <sup>1</sup>	30 Years
Iron Clad Protection <sup>1</sup>	3 Years
Limited Wind Warranty <sup>1</sup>	115 km/h (72 mph)
Limited High-Wind Warranty Upgrade <sup>1,2</sup>	125 km/h (78 mph)
Blue-Green Algae Resistant <sup>1</sup>	Yes

**PRODUCT SPECIFICATIONS<sup>3</sup>**

Length	1038 mm (40 7/8 in)
Width	349 mm (13 3/4 in)
Exposure	149 mm (5 7/8 in)
Coverage per Bundle	3.1 m <sup>2</sup> (33 1/3 ft <sup>2</sup> )

(3 bundles = 1 full square = 100 sq ft coverage)

**STANDARDS<sup>4</sup>**

ASTM D3462, ASTM D3018, ASTM D3161 – Class F,
ASTM D7158 – Class H, ASTM E108/JUL 790 – Class A, CSA A123.5.

<sup>1</sup>See Limited Warranty at [Armorooft.com](http://Armorooft.com) for complete terms, conditions, restrictions, and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. <sup>2</sup>High Wind Application is required. <sup>3</sup>All values shown are approximate. <sup>4</sup>Products are developed with reference to these standards.

**IKO Cambridge™**

The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature.

Find out more about our products now by talking to an Armorooft Sales Representative, your professional roofing contractor or contact us by email: [ArmorooftExport@IKO.com](mailto:ArmorooftExport@IKO.com), or visit our website at [www.armorooft.com](http://www.armorooft.com).



**IKO Cambridge™**



The Trusted Solution  
for a Beautiful Roof.



IKO Cambridge shingles provide superior weather protection, boost curb appeal and remain among our most popular products. Several features result in a great looking, high performance asphalt shingle right from day one.


IKO Cambridge shingles feature **Colour Blend Technology** to provide a consistent blending between product lines and manufacturing plants. Cambridge is available in a full range of color blends, regarded as some of the most aesthetically pleasing in the industry.

IKO Cambridge shingles are **Advantage Sized**, meaning they have larger dimensions than most comparable products. Larger shingles mean reduced labour and

material costs for each roofing job. The **IKO True Square Advantage** means that 3 bundles of cover exactly 100 sq. ft. of the roof.

A **wide nail** line helps guide proper nail placement for installers and make them easy to install. Nails applied in this area ensure proper installation for optimum performance.

IKO **Fastlock**® modified bitumen sealant strips along the bottom of each shingle forms a strong bond to the underlying shingles once activated by the radiant heat of the sun. This helps to protect against wind uplift, blow-off and water penetration.

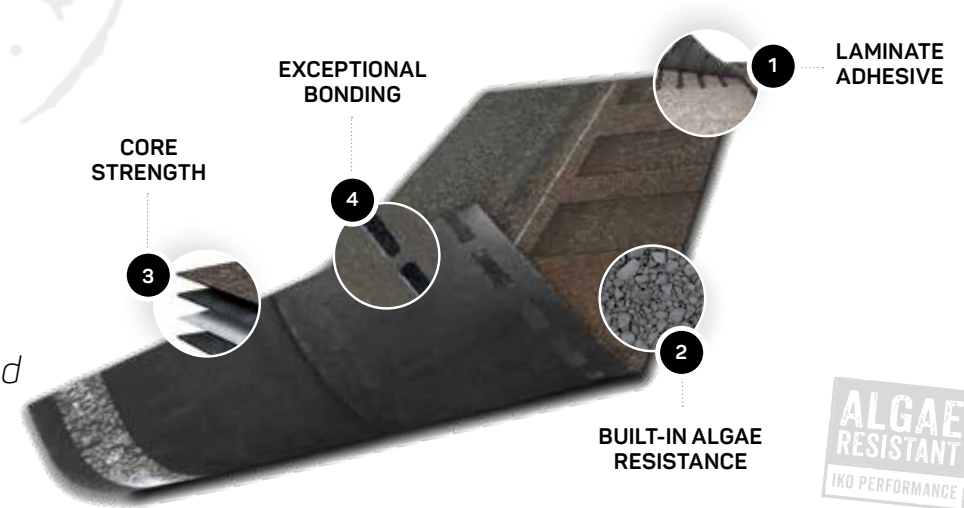

*Go ahead and touch one.*

- 1 LAMINATE ADHESIVE.** Five strips of our tough, construction-grade adhesive are used to laminate the shim to the tooth.
- 2 BUILT-IN ALGAE RESISTANCE.** Special color fast granules embedded in the shingles' surface help inhibit the growth of blue-green algae that can cause unattractive black stains, streaks and discoloration.

- 3 CORE STRENGTH.** Our resilient fiberglass mat is coated top and bottom with weathering asphalt, then surfaced with colored granules. It's heavy-duty for exceptional durability and structural integrity.
- 4 EXCEPTIONAL BONDING.** IKO's Fastlock® sealant on the shingles' bottom edge gets extra-tacky when activated by the sun's heat. This creates a strong bond to help ensure maximum protection against wind uplift, blow-off and water penetration.

**IMPORTANT!** To ensure complete satisfaction, please view several full-size shingles and an actual roof installation prior to final color selection as the shingle swatches and photography shown online, in our brochures and in our **ROOFViewer**® tool may not accurately reflect shingle color and do not fully represent the entire color blend range, nor the impact of sunlight.

