



Regency™

FIBERGLASS- REINFORCED ASPHALT SHINGLES



Regency laminated two-piece asphalt shingles feature CRC's AnchorZone, a 1 1/4-inch-wide nailing area, made with a tough reinforcing band for incredible nail-holding power.

Regency's durable fiberglass mat and thick asphalt coating not only make it one of the heaviest shingles in its class, but also enable Regency to achieve a Class 3 impact resistance rating¹. CRC's proprietary RapidLock sealant along the shingle's bottom edge, once activated by the radiant heat of the sun, creates a super-strong bond to help the shingles seal down. Three bundles of Regency cover a full square (100 square feet) of roof area.

FEATURES AND BENEFITS

- ANCHORZONE REINFORCEMENT
- FULL SQUARE COVERAGE
- CLASS 3 IMPACT RESISTANCE RATING¹
- PROPRIETARY RAPIDLOCK SEALANT
- BLUE-GREEN ALGAE RESISTANT

PRODUCT DIMENSIONS

- | | |
|------------|-----------------------|
| • LENGTH | 1,038 mm (40 7/8 in.) |
| • WIDTH | 349 mm (13 3/4 in.) |
| • EXPOSURE | 149 mm (5 7/8 in.) |

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

GENERAL INFORMATION

- | | |
|--------------------------|---|
| • SHINGLES/BUNDLE | 20 |
| • COVERAGE/BUNDLE | 3.1 m ² (33.3 ft. ²) |
| • COVERAGE/THREE BUNDLES | 9.29 m ² (100 ft. ²) |
| • BUNDLES/PALLET | 56 |
| • PALLET SIZE | 101 x 135 cm (40 x 53 in.) |
| • PRODUCT STOCK NO. | 4982XXX |

NOTE: XXX refers to numerical product colour code. Product colour availability varies by region.

Click [here](#) or scan this QR code for product literature, colour swatches, and colour availability.





Regency™

APPLICABLE STANDARDS²

- ASTM D3462 Product Standard
- ASTM D3018 Product Standard
- ASTM D3161 Class F Wind Test
- ASTM D7158 Class H Wind Test
- ASTM E108 Class A Fire Test³
- CAN/ULC S107 Class A Fire Test³
- FM 4473 Class 3 Impact Resistance Test¹
- CSA A123.5 Product Standard

NOTE: CRC Regency asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture, including minimum total product weight, minimum tear-strength resistance, maximum granule loss and minimum asphalt mass.


SAFETY INFORMATION

CAUTION: Working at heights on sloped roof surfaces can be dangerous. Do not install until all appropriate safety precautions have been read and understood. Always wear appropriate personal protective equipment (PPE) including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).



SHINGLE INSTALLATION

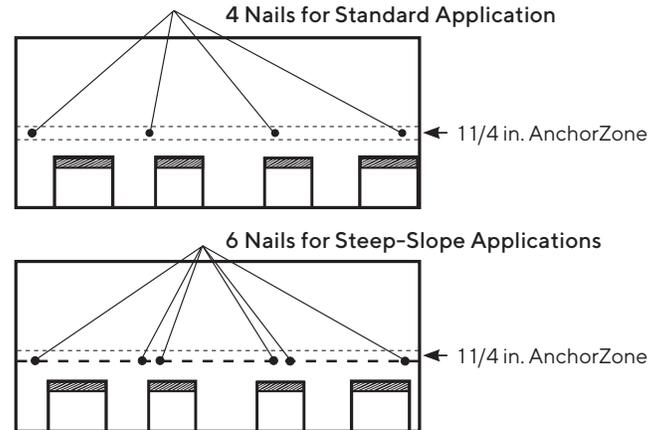

Shingles must be installed according to all of CRC's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (i.e., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Shingles should be installed with 5 7/8 inches shingle exposure to the weather.
3. Offsets between courses should be 10 inches.
4. It is critical to use the nail lines as a guide and position nails in either nail line, or in the zone between the nail lines.
5. On steep slopes (21:12 or steeper) and mansard roofs, six nails must be placed in the lower nail line.
6. Open metal valleys are recommended for best roof system performance.

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact CRC directly at: **1-855-CRC-ROOF (1-855-272-7663)**.

¹The Impact Resistance rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer, and damage from hail is not covered under the Limited Warranty. For further details concerning the FM 4473 standards, visit the FM Approvals website. ²Compliance with listed products standards is based on sampling and testing of products as-manufactured. ³When shingles are installed with an approved underlayment. For more information, please contact CRC at: **1-855-CRC-ROOF (1-855-272-7663)**.